

EC 106 *XSafe*

Scotsman
Ice Systems

Self Contained Ice Machine 50 kg

شركة ميم الثلج لتجارة الأجهزة الكهربائية



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior. Simple and reliable electromechanic controls.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC L 106
Large Gourmet 39 g
Ø 38 x H 41 mm



EC M 106
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

23 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 50 kg


March 2022

EC 106 XSafe

Self Contained Ice Machine 50 kg

شركة فمم الثلج لتجارة الألبسة الكمبرانية

Self Contained Ice Machine 50 kg

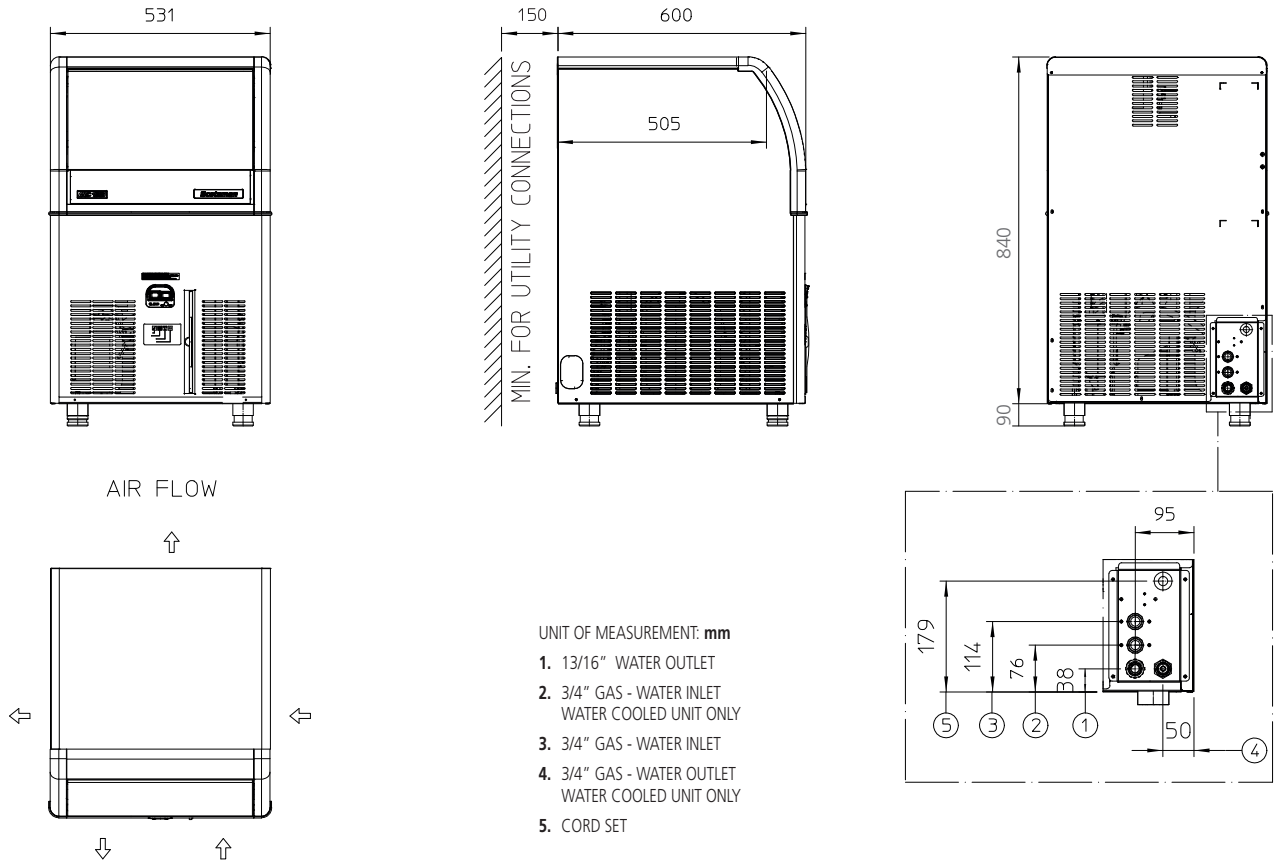

UNIT DATA		SHIPPING DATA									
Size (W x D x H)		531 x 600 x 930 mm		Carton (W x D x H)		600 x 670 x 950 mm					
Net weight		49 kg		Weight		56 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
ECL 106 AS	230/50/1	50	48	38	26.7	10.9	4.2	550	1200	3 x 1.5	10
ECM 106 AS	230/50/1	50	48	38	26.8	10.2	6.0	580	1300	3 x 1.5	10
ECM 106 WS	230/50/1	50	48	41	24.4	10.0	53.3	580	1300	3 x 1.5	10
ECM 106 AS	230/60/1	50	48	38	33.7	12.8	5.8	700	1530	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions