

EC 126

Self Contained Ice Machine 70 kg

شركة ميم الثلج لتجارة الأيسرة الكهربائية



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior. Advanced diagnostics computerized control.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC L 126
Large Gourmet 39 g
Ø 38 x H 41 mm



EC M 126
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a
R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

39 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 70 kg


March 2022

EC 126

Self Contained Ice Machine 70 kg

شركة قمم الثلج لتجارة الأجهزة الكهربائية

Self Contained Ice Machine 70 kg

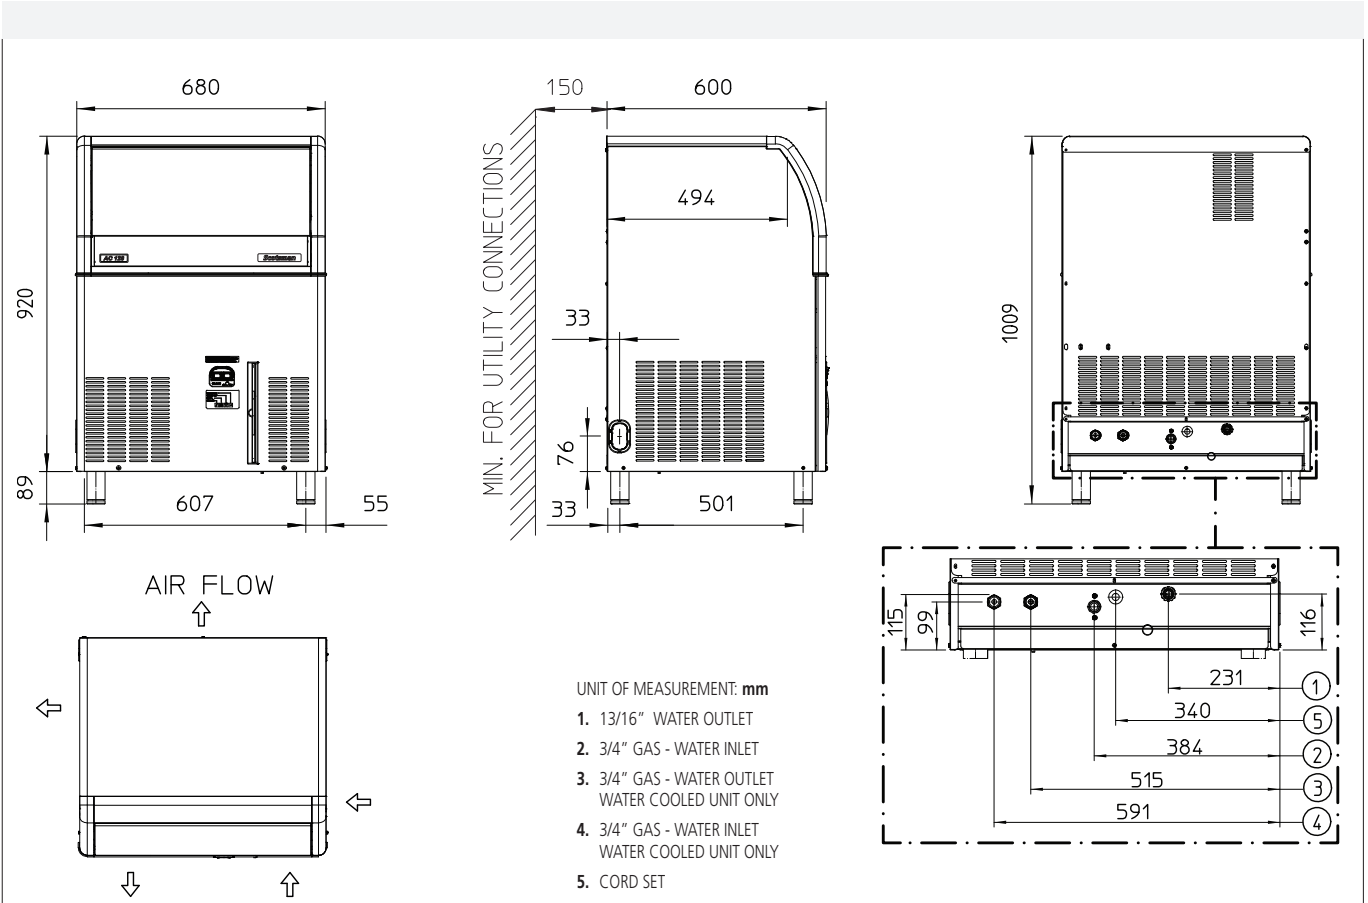

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	680 x 600 x 1009 mm	Carton (W x D x H)	750 x 670 x 1100 mm								
Net weight	67 kg	Weight	77 kg								
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*) l/h	Instant power W	Compressor W	Circuit wires No. x Ømm ²	Max. fuse size A
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h					
ECL 126 AS	230/50/1	63	61	49	28.6	14.0	5.8	770	1440	3 x 1.5	10
ECL 126 WS	230/50/1	70	66	58	24.1	13.0	68.8	600	1440	3 x 1.5	10
ECM 126 AS	230/50/1	70	66	55	24.6	13.8	5.7	740	1450	3 x 1.5	10
ECM 126 WS	230/50/1	74	71	60	20.5	12.3	70.8	580	1450	3 x 1.5	10
ECM 126 AS	230/60/1	80	77	60	24.7	14.8	6.3	750	1880	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions