MXG 328 XSafe

Scotsman[®]

Modular Ice Machine 150 kg

شركة مجمم الثلج لتجارة الأجمزة الكمربائية



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG L 328 Large Gourmet 39 g Ø 38 x H 41 mm



MXG M 328 Medium Gourmet 20 g Ø 30 x H 34 mm



MXG S 328 Small Gourmet 8 q Ø 21 x H 25 mm

CONDENSING
SYSTEM

Air cooled Water cooled

F	RECOMMEN	IDED BIN	IS
Head	Bins	kg	
MXG 328	~	SB193	129
IVIAG 328	V	SB322	168

REFRIGERANT GAS

R404A R452A

VOLTAGE V/Hz/ph

230/50/1 230/60/1

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation CBTxxxxxxxxx : need additional bin top

CERTIFICATIONS















Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

www.scotsman-ice.it www.scotsman-ice.com


Net weight

MXG 328 XSafe



Modular Ice Machine 150 kg

شركة همم الثلج لتجارة الأجمزة الكمربائية

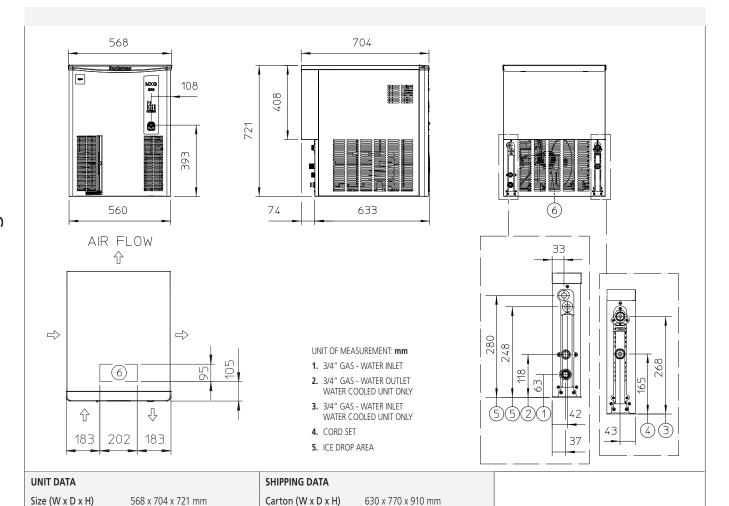

, ,		5		3							
		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/	l/h	w	W	No. x Ømm²	А
		kg	kg	kg	100 kg						
MXGL 328 AS	230/50/1	140	137	110	20.5	22.5	10.8	1170	2650	3 x 1.5	16
MXGL 328 WS	230/50/1	135	133	114	17.2	19.6	79.2	950	2650	3 x 1.5	16
MXGM 328 AS	230/50/1	150	147	110	21.2	23.3	13.3	1200	2650	3 x 1.5	16
MXGM 328 WS	230/50/1	150	145	126	15.8	20.5	91.7	950	2650	3 x 1.5	16
MXGS 328 AS	230/50/1	145	132	105	21.2	22.2	14.0	990	2570	3 x 1.5	16
MXGS 328 WS	230/50/1	155	148	130	16.7	21.7	150.0	960	2570	3 x 1.5	16
MXGL 328 AS	230/60/1	144	141	112	23.8	26.2	15.0	1350	3100	3 x 1.5	16
MXGM 328 AS	230/60/1	150	144	110	24.7	27.2	14.6	1360	3115	3 x 1.5	16
MXGM 328 WS	230/60/1	150	144	130	20.0	26.0	125.0	1200	3115	3 x 1.5	16
MXGS 328 AS	230/60/1	165	152	130	20.8	27.0	160.4	1200	3115	3 x 1.5	16
MXGS 328 WS	230/60/1	165	152	130	20.8	27.0	160.4	1200	3115	3 x 1.5	16

77 kg

Weight

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

66 kg